


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/24/11	D.FRISIELLO

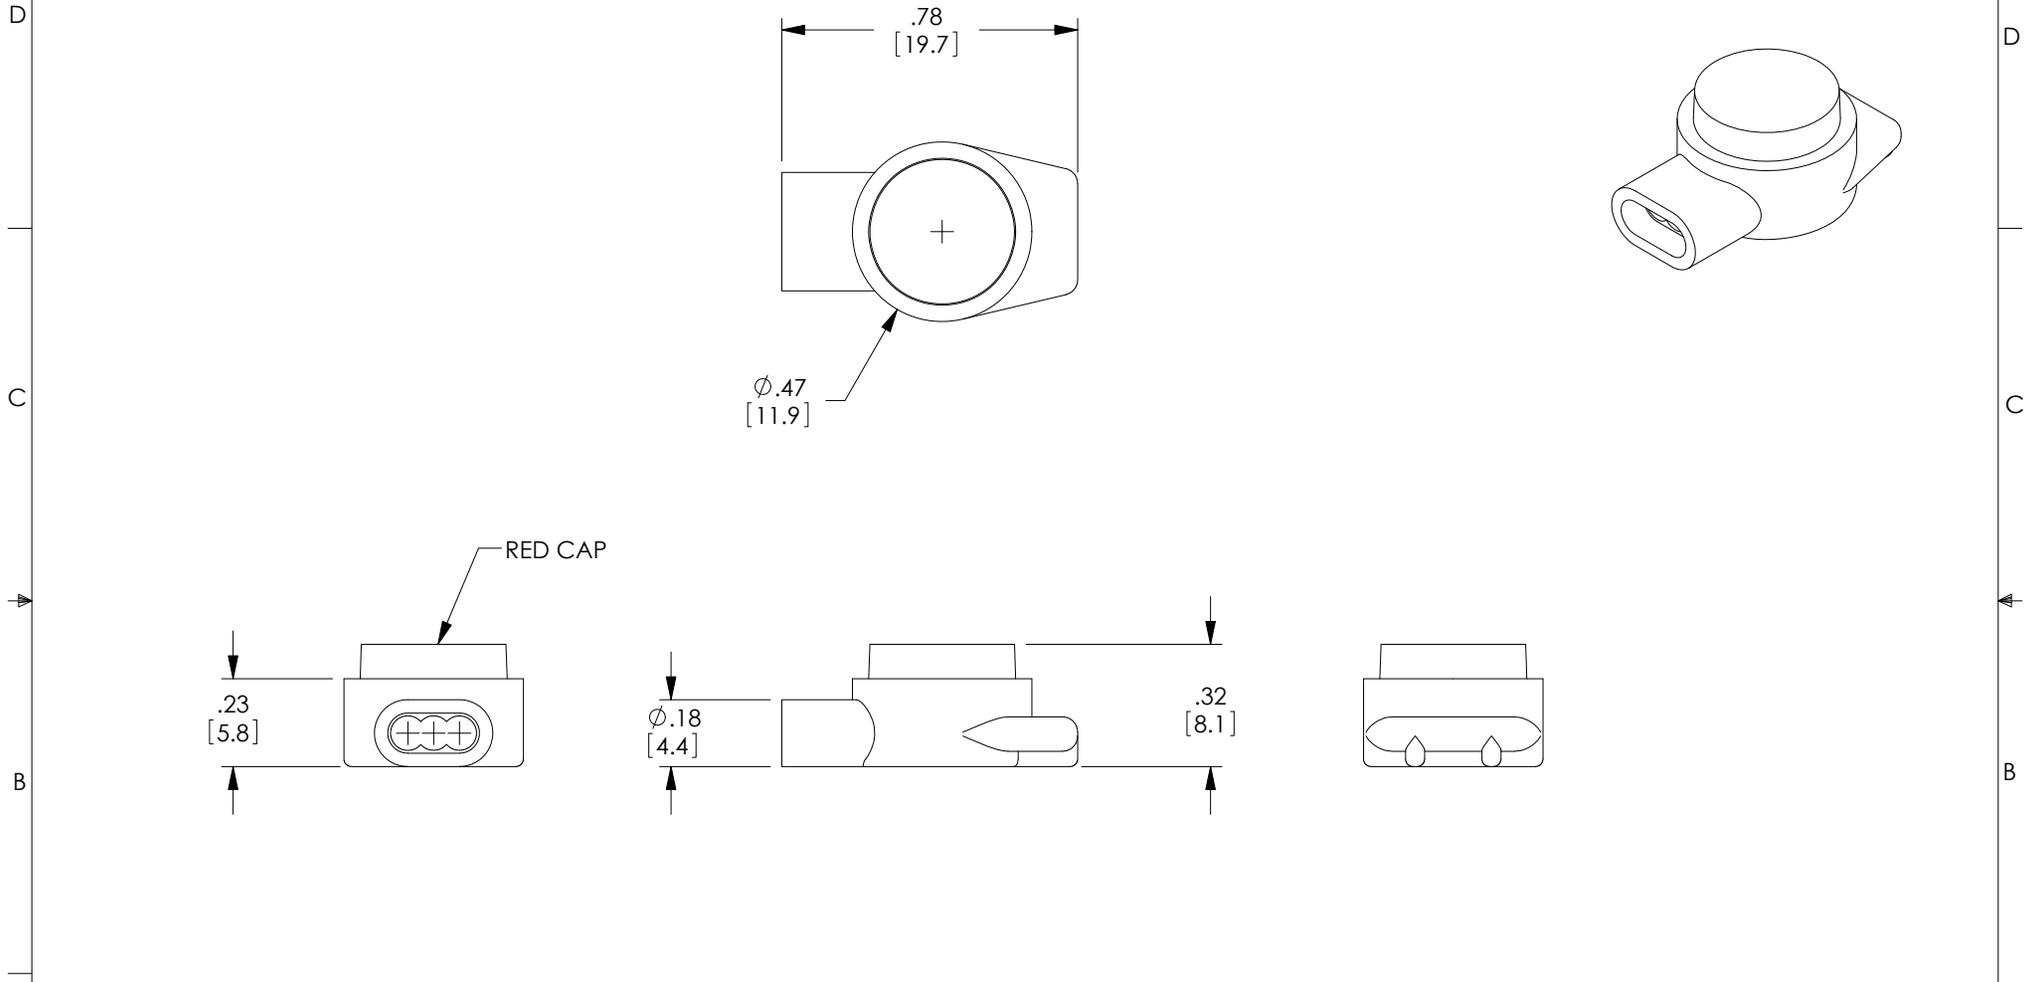

NOTES:  
 WIRE GAUGE: 19-26 AWG WITH .066 INSULATION DAIMETER MAX.  
 ALL DIMENSIONS ARE FOR REFERENCE ONLY.  
 COMPONENT SHALL BE PACKAGED IN QAUNTITY OF 100.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 .XX = ± .02 .XXX = ±.005	APPROVALS D.FRISIELLO	DATE 8/24/11		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY J.RUST	DATE 8/24/11		CATEGORY TELECOM/MODULAR
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	APPROVED BY D.GALLAGHER	PRODUCT DESCRIPTION 3-WIRE BUTT SPLICE -GEL FILLED	SIZE <b>A</b>
COLOR VARIATIONS MAY OCCUR	FSCM NO. <b>43321</b>	DWG. NO. WT-UR	REV. <b>A</b>	SCALE: NONE
CAD FILE: WT-UR.SLDDRW	SHEET 1 OF 1			