

## 120 VAC 18x16x8 Inch Vented Weatherproof Enclosure with Mounting Plate Model: NB181608-10V


### Applications and Features

#### Features:

- Molded Fiberglass Reinforced Polyester (FRP) industrial Enclosure
- Stainless steel quick release latches with padlock hasps
- NEMA Type 3R, 3RX / IP24 rated
- Fully gasketed raised Vented lid with removable filters & integral mounting flange
- Features aluminum mounting plate with surge protected duplex 120 VAC Outlets

#### Applications:

- Remote Wireless LAN WiFi equipment installations
- Indoor and outdoor installations
- Rapid Deployment Installations
- Corrosive environments & hotspot applications
- Protection of equipment from theft or damage

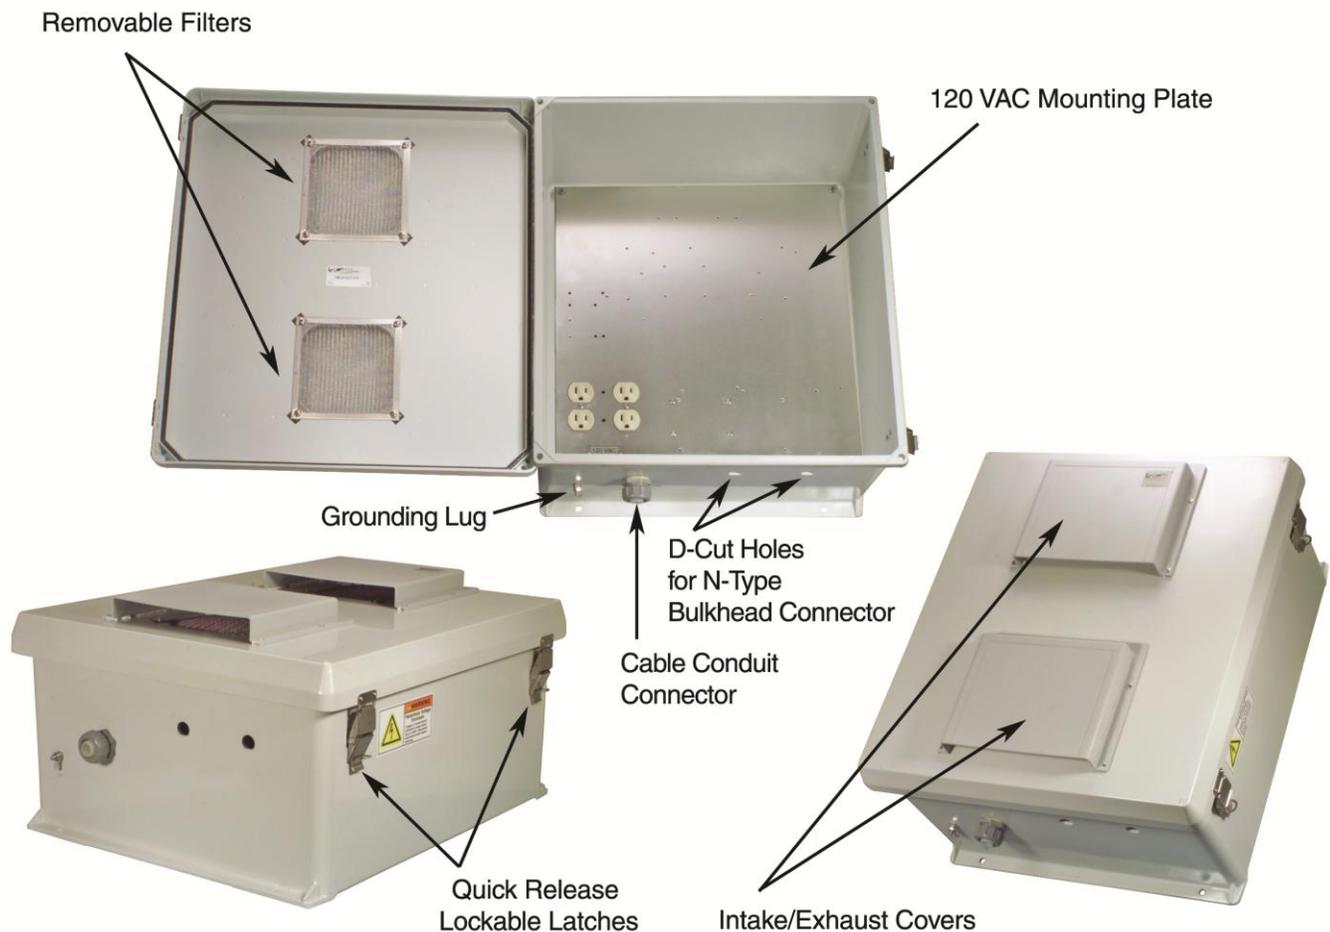

## Product Description

---

### Start with the Box...

The box is a rugged 18" x 16" x 8" weatherproof enclosure that is ideal for both indoor and outdoor applications. Constructed from molded fiberglass, it is well suited for high temperature or corrosive environments. The mounting flange allows it to be wall mounted as well as on a flat surface. The box can also be pole mounted with the optional pole mounting hardware kit. The fully gasketed lid features a stainless steel continuous hinge and stainless steel quick release latches with padlock hasps. The enclosure material is UV stabilized and comes in machine tool gray. The enclosure also features holes for mounting Lightning Protectors or Connectors, a grounding lug and 1/2" cable conduit connector.



Due to the large size of this enclosure, it can accommodate dual sets of most access points. The example to the right shows one of the many ways the enclosure can be configured.

### Mounting Plate

The aluminum mounting plate has provisions to mount WLAN equipment from Cisco®, Symbol®, D-Link®, HyperLink and more. With the optional HGX-AMOUNT02 bracket a wide array of HyperLink Amplifiers, Power-Over-Ethernet products and Power Supplies can be mounted as well. Two of these brackets can be mounted side by side. Also available is the HGX-NMOUNT03 Universal Mounting Shelf that can be attached to the mounting plate and can accommodate additional equipment to be placed in the enclosure. The plate features four standard surge protected 120 VAC outlets and a terminal strip to supply power to internal equipment.

### Vented Enclosure

The NB181608-10V features a vented lid with removable filters and vent covers on the outside of the enclosure.


### Lightning Protection

Surge protection is provided as a standard feature on the internal AC outlets. In addition, the unit can accept up to two optional bulkhead-mount N-Type lightning protectors to protect the coaxial cable runs. Mounted to the optional HGX-AMOUNT02 bracket, the HGLN-CAT5 lightning protector can be used with Power-over-Ethernet applications.

**Specifications**

<b>Enclosure Material</b>	Fiberglass Reinforced Polyester
<b>Enclosure Color</b>	Machine Tool Gray
<b>Voltage</b>	120 VAC
<b>Mounting Plate Material</b>	.10 in. (2.5mm) Thick Anodized Aluminum
<b>Mounting Plate Dimensions</b>	16.8 x 14.8 inches (42.6 x 37.5 cm)
<b>Weight</b>	19 lbs (8.6 kg)
<b>Outside Dimensions (max)</b>	19.5 x 17.5 x 10 inches (49.5 x 44.4 x 25.4 cm)
<b>Inside Dimensions</b>	17.7 x 15.7 x 8.5 inches (44.9 x 39.9 x 21.6 cm)
<b>Flame Rating</b>	UL 94-5V
<b>RoHS Compliant</b>	Yes
<b>Cable Feed</b>	1/2" Cable Conduit Connector
<b>Ratings</b>	NEMA Type 3R, 3RX / IP24

**Enclosure Dimensions**

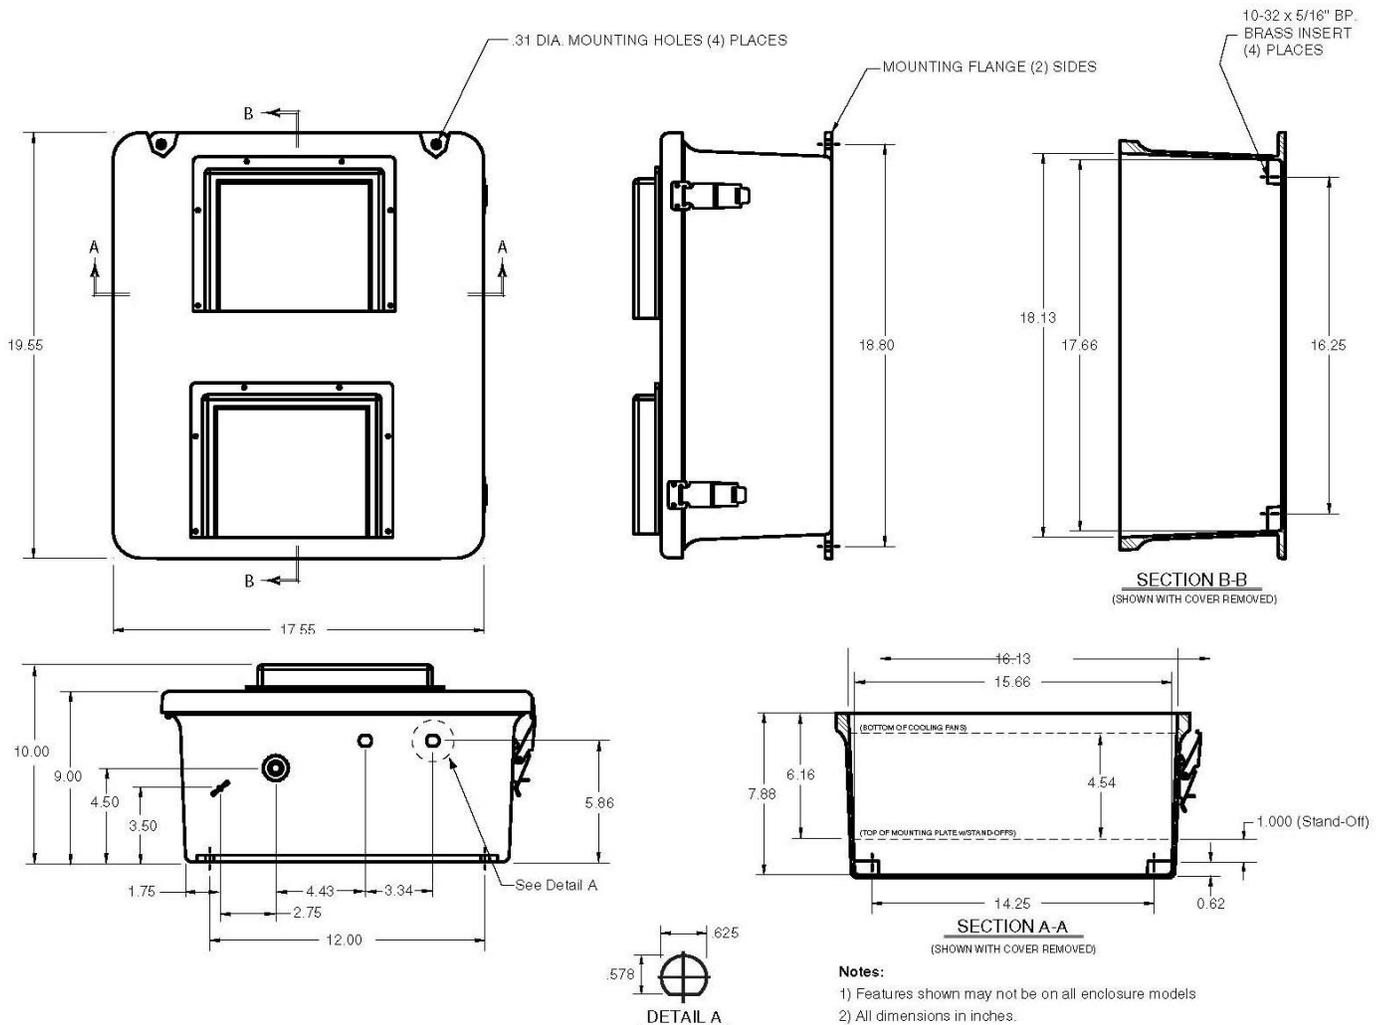

**Notes:**  
 1) Features shown may not be on all enclosure models  
 2) All dimensions in inches.

**Mounting Plate Details**

