
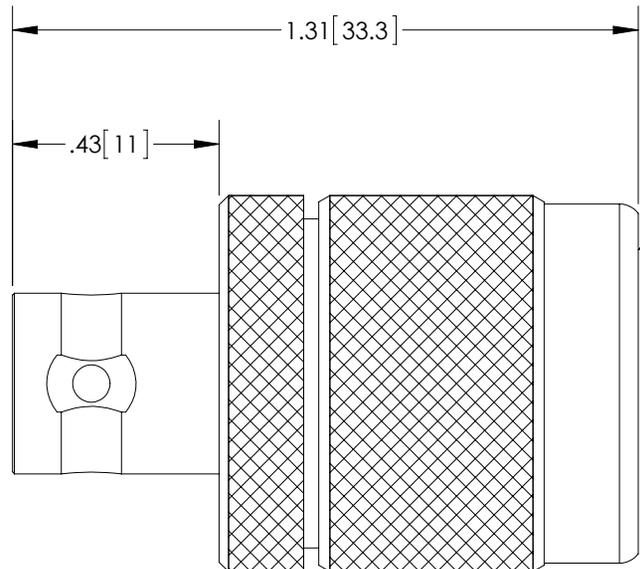
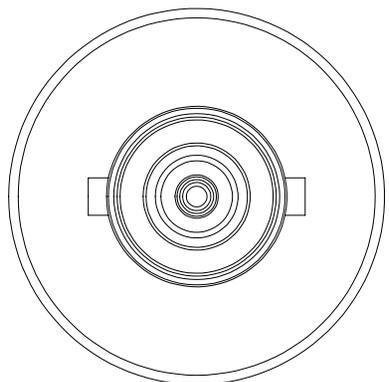



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/13/12	D.GRIFFIN
-	-	-	-
-	-	-	-

DESCRIPTION	MATERIAL	FINISH
MAIN BODY	BRASS	NICKEL
INSULATOR	PTFE	-
CENTER PIN	BRASS	GOLD
RETAINING RING	BRASS	NICKEL
GASKET	RUBBER	-
PRESS FIT GROUND RING	BRASS	NICKEL
SHELL	BRASS	NICKEL

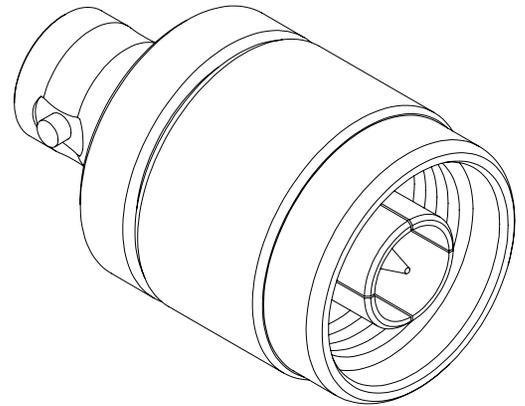

5/8-24UNEF

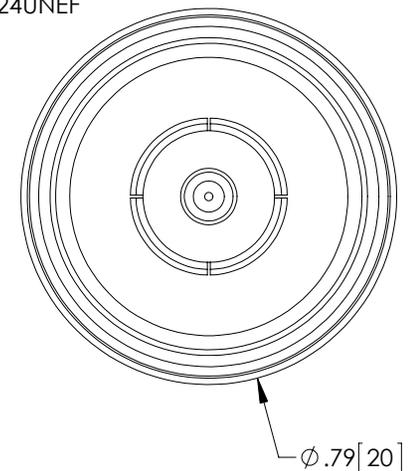

NOTES:

ELECTRICAL:

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: DC - 2.5GHz
 VOLTAGE RATING: 500 VOLTS PEAK
 WITHSTANDING VOLTAGE: 1000 V
 INSERTION LOSS: .2dBi MAX

MISCELLANEOUS:

COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.PUCHASKI	08/10/12		
	CHECKED BY K.BURGNER	08/10/12	CATEGORY COAXIAL	
	APPROVED BY K.BURGNER	08/10/12	PRODUCT DESCRIPTION ADAPTER, N-MALE TO BNC FEMALE	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SIZE A	FSCM NO. 43321	DWG. NO. AXA-NMBF
SCALE: NONE		CAD FILE: AXA-NMBF.SLDDRW		SHEET 1 OF 1