


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/25/16	D.GRIFFIN

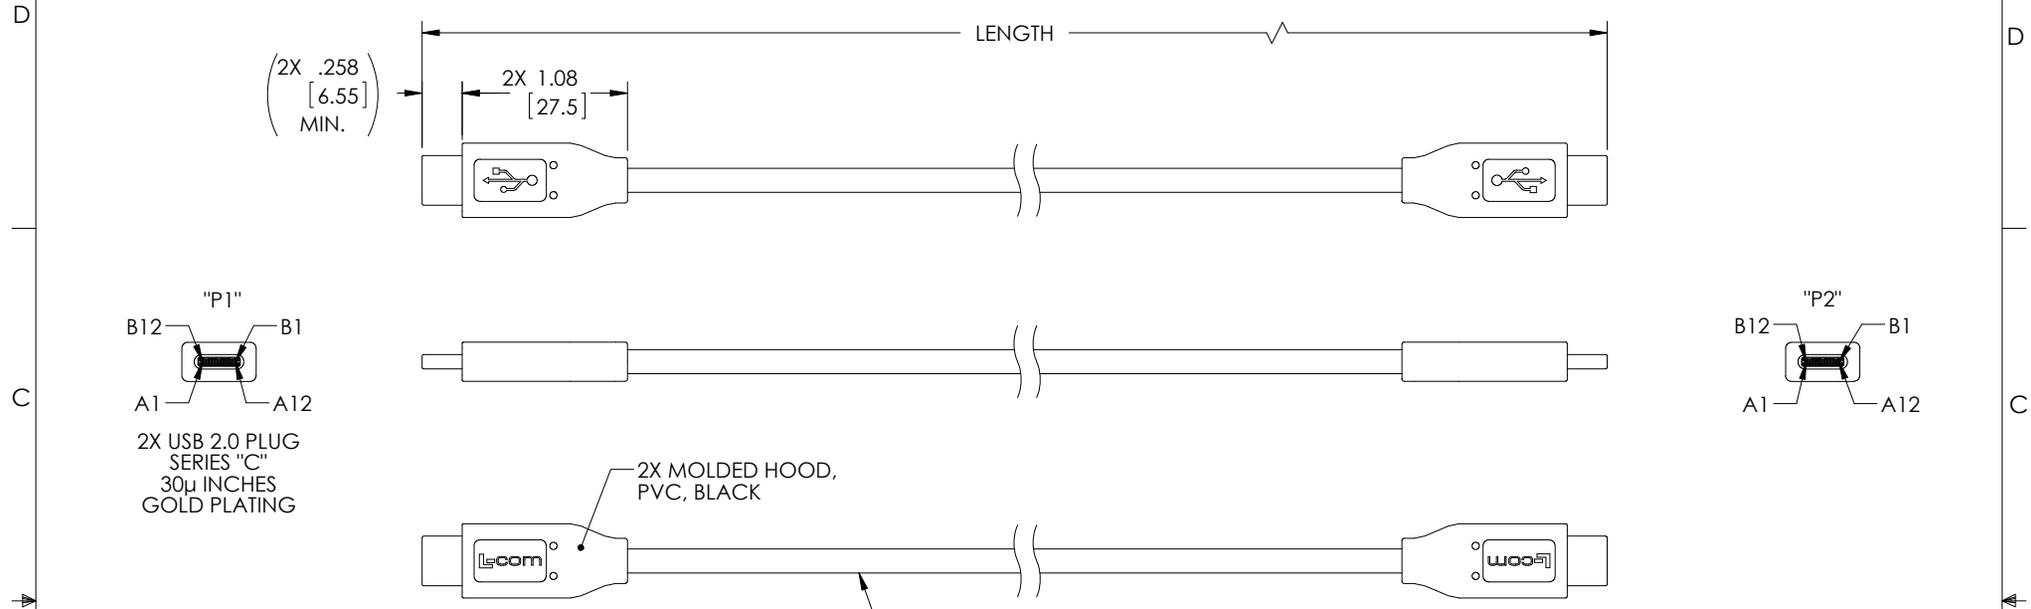

"P1"  
B12 B1  
A1 A12  
2X USB 2.0 PLUG  
SERIES "C"  
30μ INCHES  
GOLD PLATING

"P2"  
B12 B1  
A1 A12

2X MOLDED HOOD,  
PVC, BLACK

UL STYLE 2725,  
(1) 28AWG STRANDED TINNED COPPER TWISTED PAIR  
(3) 28AWG STRANDED TINNED COPPER CONDUCTORS  
OVERALL ALUMINUM/POLYESTER SHIELD PLUS TINNED  
COPPER BRAID SHIELD AND DRAIN WIRE  
JACKET: PVC, BLACK (NOM DIA. .157" [4.0])

WIRE MAP					
"P1"	SIGNAL NAME	CONDUCTOR	"P2"	SIGNAL NAME	COLOR
A1,B1,A12,B12	GND	INDV.	A1,B1,A12,B12	GND	BLACK
A4,B4,A9,B9	VBUS	INDV.	A4,B4,A9,B9	VBUS	RED
A5	CC	INDV.	A5	CC	YELLOW
B5	VCONN	N/C	B5	VCONN	N/A
A6	Dp1	UNSHIELDED PAIR	A6	Dp1	GREEN
A7	Dn1		A7	Dn1	WHITE
SHELL	SHIELD	BRAID	SHELL	SHIELD	N/A

PART NUMBER	LENGTH METERS [FEET]
CAU2CC-03M	0.3 [.98]
CAU2CC-05M	0.5 [1.64]
CAU2CC-1M	1.0 [3.28]
CAU2CC-2M	2.0 [6.56]
CAU2CC-3M	3.0 [9.84]
CAU2CC-5M	5.0 [16.40]

- NOTES:**
- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
  - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  - L-COM LOGO AND USB ICON MAY BE ON ANY SIDE OF THE OVERMOLD FOR USB SERIES "C" END.
  - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	APPROVALS DRAWN BY D. CASTRO CHECKED BY S. LI APPROVED BY S. LI	DATE 4/23/15 1/21/16 1/21/16	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY USB		PRODUCT DESCRIPTION CBL USB 2.0 TYPE C/C		
	PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>		FSCM NO. <b>43321</b>	DWG. NO. <b>CAU2CC</b>
	SCALE: NONE		CAD FILE: CAU2CC.SLDDRW		SHEET 1 OF 1	