


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.




PART NUMBER	LENGTH	
	FEET	METERS
PMDVI-DSLMF-1	1.0	[.31]
PMDVI-DSLMF-3	3.0	[.91]
PMDVI-DSLMF-5	5.0	[1.52]
PMDVI-DSLMF-10	10.0	[3.05]

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/6/15	D.GRIFFIN
B	ECN8182: UPT DWG FROM MOLDED THUMBSCREW TO METAL THUMBSCREW	11/28/2015	B.ZHANG

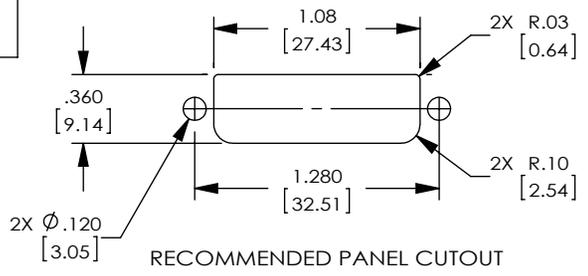

RECOMMENDED PANEL CUTOUT


FEMALE DVI-I DUAL LINK CONNECTOR 30µ" GOLD PLATED CONTACTS

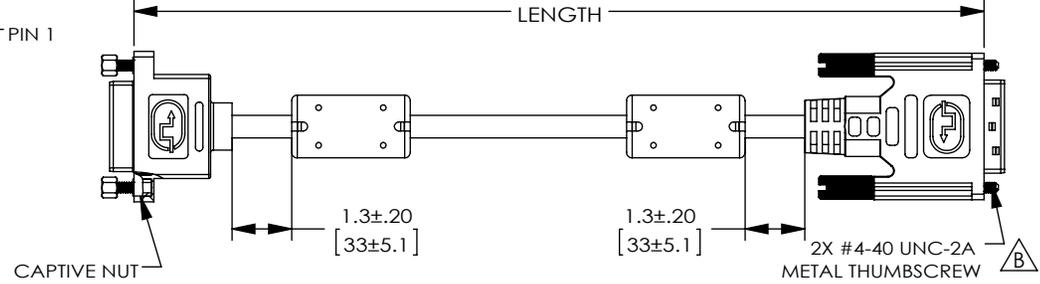

MALE DVI-D SINGLE LINK CONNECTOR 30µ" GOLD PLATED CONTACTS


U.L. STYLE 20276
(4) 30AWG INDIVIDUALLY SHIELDED TWISTED PAIRS, (5) 28AWG CONDUCTORS, OVERALL ALUMINIZED POLYESTER FILM SHIELD PLUS TINNED COPPER BRAID SHIELD, PVC OUTER JACKET: GRAY (PANTONE 424C). (NOM DIA. .236" [6], MIN BEND RAD 2.36" [60])

MOLDED PVC HOOD GRAY (PANTONE 424C)

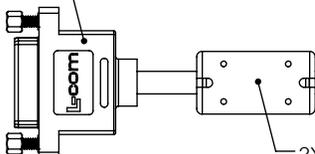

2X ENCAPSULATED FERRITE BEAD, PVC, GRAY (PANTONE 424C)

MOLDED PVC HOOD WITH INTERNAL METAL BACKSHELL SHIELD, GRAY (PANTONE 424C)




"J1"	WIRE MAP	"P1"
19	—	19 (GND)
18	—	18 (LT. GREEN)
17	—	17 (BLACK)
10	—	10 (YELLOW)
9	—	9 (BROWN)
11	—	11 (GND)
15	—	15 (BLACK)
14	—	14 (BROWN)
2	—	2 (RED)
1	—	1 (ORANGE)
3	—	3 (GND)
22	—	22 (GND)
23	—	23 (LT. BLUE)
24	—	24 (WHITE)
16	—	16 (ORANGE)
7	—	7 (YELLOW)
6	—	6 (WHITE)
SHELL	—	SHELL (SHIELD DRAIN WIRE)

PIN 8 NO CONNECTION

- NOTES:**
- CABLE SHALL BE TESTED FOR CONTINUITY.
 - CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.
 - DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)



SUPPLIED WITH (4) #4-40 JACKSCREWS FOR PANEL MOUNT
2X H = .160
2X H = .191

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE
	DRAWN BY D. CASTRO	8/1/14
	CHECKED BY D. FRISIELLO	8/14/14
	APPROVED BY S. SMITH	9/23/14
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.3]	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
PROJECTION	COLOR VARIATIONS MAY OCCUR	

		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY		AUDIO/VIDEO	
PRODUCT DESCRIPTION			
CA DVI-D PNL MNT SGL LNK			
SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	PMDVI-DSLMF	B
SCALE: NONE		CAD FILE: PMDVI-DSLMF.SLDRW	SHEET 1 OF 1