


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	Initial Release	11/05/09	B.Puchaski

DESCRIPTION	MATERIAL	FINISH
SHELL	BRASS	NICKEL
BODY	BRASS	NICKEL
CENTER PIN	Phosphor Bronze	GOLD
SLEEVE	BRASS	NICKEL
INSULATOR	TEFLON	---
GASKET	SI-RUBBER	ORANGE
RETAINING RING	BRASS	NICKEL
RESISTOR	50 Ohm	---

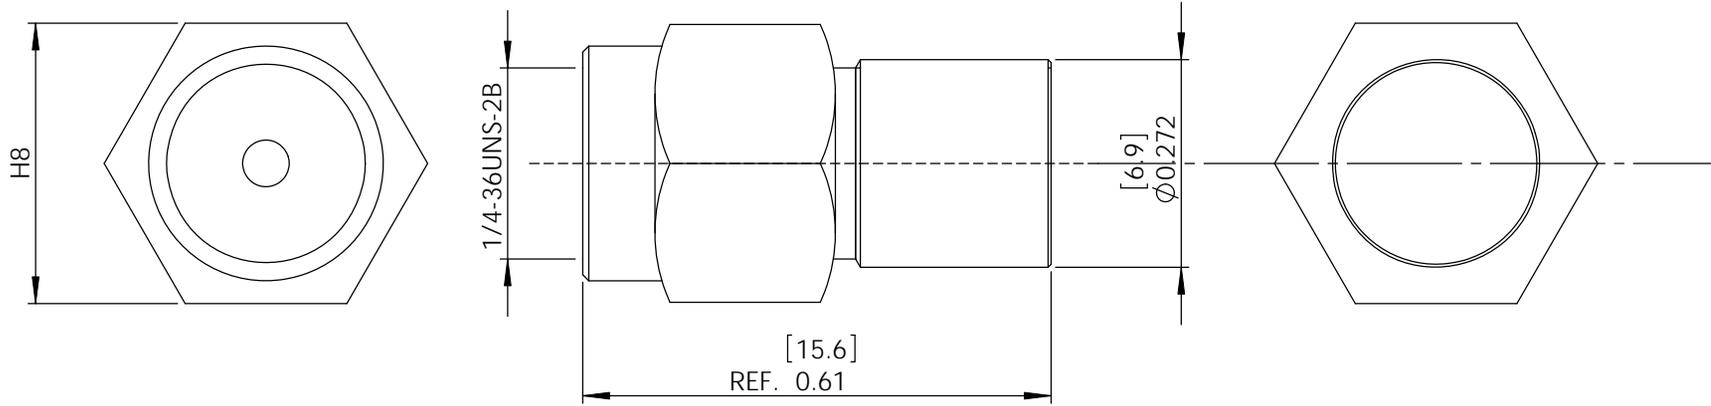

NOTES:

ELECTRICAL:
 IMPEDENCE: 50 OHMS
 FREQUENCY RANGE: 0~6 GHz
 VSWR: ≤1.50 @ 0~6 GHz
 POWER RATING: 1 WATT

MISCELLANEOUS:
 COMPONENTS SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATIONS PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

RoHS Compliant

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1° PROJECTION	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	DRAWN BY B.Puchaski	09/22/09		CATEGORY
	CHECKED BY M.Audas	09/22/09		CONNECTOR
	APPROVED BY M.Audas	09/22/09	PRODUCT DESCRIPTION	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		50 Ohm RP-SMA PLUG TERMINATOR	
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	
		DWG. NO. ARSP-TERM	REV. A	
	SCALE: NONE		CAD FILE: ARSP-TERM.SLDDRW	
			SHEET 1 OF 1	