



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/19/13	D.GRIFFIN

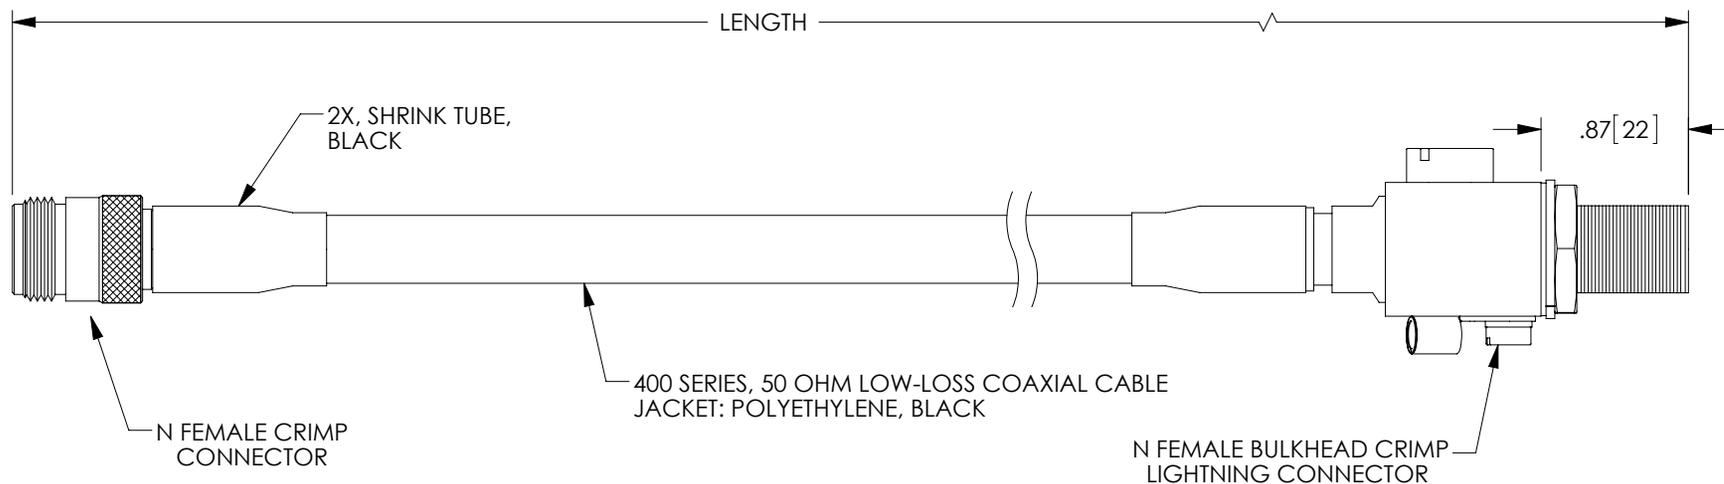

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA4NFLPNFXXX	WHERE XXX = LENGTH IN FEET	CA4NFLPNF010 (10 FEET)
CA4NFLPNFNXX	WHERE NXX = LENGTH IN INCHES	CA4NFLPNFN16 (16 INCHES)
CA4NFLPNFMXX	WHERE MXX = LENGTH IN METERS	CA4NFLPNFM07 (7 METERS)
CA4NFLPNFXMX	WHERE XMX = LENGTH IN DECIMAL METERS	CA4NFLPNF3M5 (3.5 METERS)

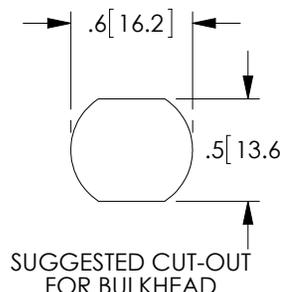

**NOTES:**

LP ELECTRICAL SPECS:  
 IMPEDANCE: 50 OHMS  
 FREQUENCY RANGE: 0 - 5.8GHz  
 GAS TUBE BREAKDOWN VOLTAGE: 90V ± 20%

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**

RoHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS DRAWN BY B.PUCHASKI	DATE 08/16/13		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CHECKED BY P.PESA	DATE 08/16/13		CATEGORY COAXIAL	
	APPROVED BY P.PESA	DATE 08/16/13	PRODUCT DESCRIPTION CA400 NF-NF LP	SIZE <b>A</b>	FSCM NO. <b>43321</b>
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	DWG. NO. CA4NFLPNF	REV. <b>A</b>
SCALE: NONE			CAD FILE: CA4NFLPNF.SLDDRW		
			SHEET 1 OF 1		