

6

5

4


3

2

1

## REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	E	UPDATED PER ECO-14399	03/10/2025	HBAKKE	SRAUTUS

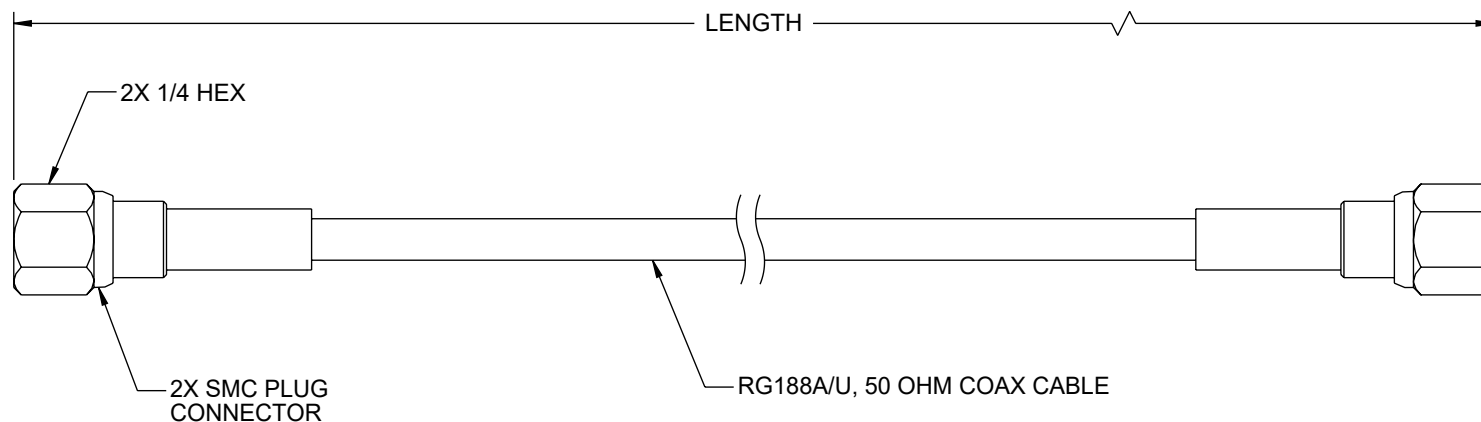

ITEM NUMBER	LENGTH	
	FEET	METERS
CCSC188A-1	1.0	0.30
CCSC188A-1.5	1.5	0.46
CCSC188A-2	2.0	0.61
CCSC188A-2.5	2.5	0.76
CCSC188A-3	3.0	0.91
CCSC188A-4	4.0	1.22
CCSC188A-5	5.0	1.52
CCSC188A-7.5	7.5	2.29
CCSC188A-10	10.0	3.05

## NOTES:

- CABLE ASSEMBLY IS DESIGNED FOR HIGH TEMPERATURE APPLICATIONS (165°C).
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN A POLYBAG.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS


TOLERANCES:  
X = ±.2 [5]      FRACTIONS  
.XX = ±.02 [0.5]      ± 1/32  
.XXX = ±.005 [0.13]      ANGLES ± 1°

CABLE LENGTH TOLERANCES:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤ 60 [1524] = +2 [51] / -0  
>60 [1524] ≤ 120 [3048] = +4 [102] / -0  
>120 [3048] ≤ 300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
UN-DIMENSIONED/NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY

**L-com®**  
an INFINIT® brand

Website: [www.L-com.com](http://www.L-com.com)  
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE      SHEET  
NONE      1 OF 1

## DESCRIPTION

RG188 COAXIAL CABLE, SMC PLUG/PLUG

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	DGUTTADAUR	CCSC188A	E

6

5

4

3

2

1