




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
G	ECN 4564- ADDED ROHS, UPDATED DRAWING AND NEW FORMAT	3/3/10	D.FRISIELLO
H	ECN 5937- ADDED NOTE FOR PANEL MOUNTING	1/25/12	D.FRISIELLO

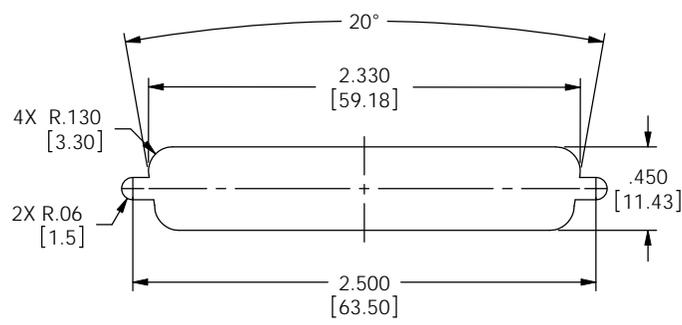


RECOMMENDED PANEL OPENING
(MAX PANEL THICKNESS: 0.06")

NOTE: DIFFERENT STANDOFFS AND JACK SCREWS ARE REQUIRED FOR PANEL MOUNTING. SEE WWW.L-COM.COM OR MASTER CATALOG FOR DETAILS.

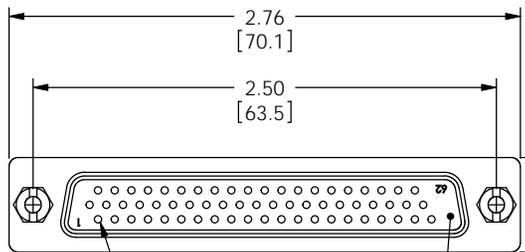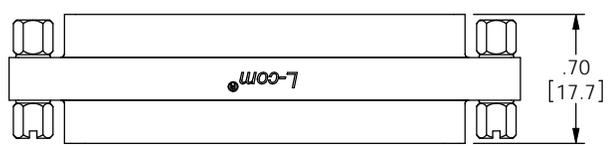


POSITION 1
2X 62 CONTACT FEMALE HIGH DENSITY D-SUB CONNECTOR

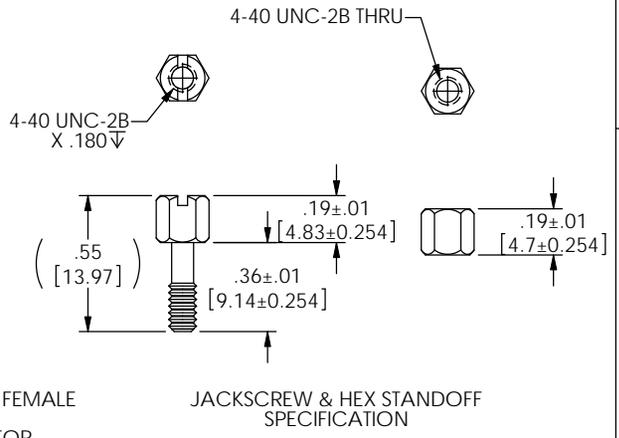

JACKSCREW & HEX STANDOFF SPECIFICATION

NOTES:
MATERIAL:
SHELL: STEEL
CONTACTS: COPPER ALLOY
HARDWARE: BRASS
INSULATOR: PBT FIBER REINFORCED (UL94V-0 RATED)
FINISH:
SHELL: TIN/NICKEL PLATED
CONTACTS: GOLD FLASH PLATED
HARDWARE: NICKEL PLATED
ELECTRICAL:
CURRENT RATING: 3 AMP

4X $.03^{+.00}_{-.03}$
[0.76 0 -0.762]

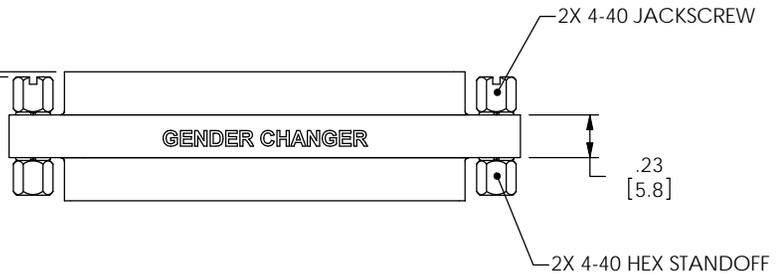


GENDER CHANGER

MISCELLANEOUS:
OPERATING TEMPERATURE RANGE: -55°C TO +105°C.
ALL CONTACTS ARE WIRED STRAIGHT THROUGH.
COMPONENT SHALL BE TESTED FOR CONTINUITY.

LABELING:
PANTONE 2945 BLUE. "L-COM" FONT MyriaMM ITALIC.
"GENDER CHANGER" FONT ARIAL BOLD, TEXT HEIGHTS: .085"
TEXT COLOR: WHITE.

PACKAGING:
COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

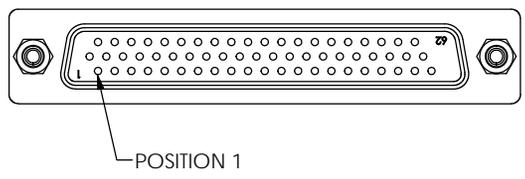

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)	APPROVALS	DATE
DIMENSIONAL TOLERANCES: X = ±.1 XX = ±.01 XXX = ±.005	DRAWN BY D.PARIAM	03/01/2002
ANGULAR TOLERANCES: ALL = ±1°	CHECKED BY T.CLARK	03/01/2002
PROJECTION	APPROVED BY R.CARRICK	03/01/2002

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			
COLOR VARIATIONS MAY OCCUR			

L-com Global Connectivity		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
CATEGORY: D-SUBMINIATURE			
PRODUCT DESCRIPTION: GENDER CHANGER, HD62 FEMALE/FEMALE			
SIZE: B	P/SCM NO.: 43321	DWG. NO.: DGBH62F	REV.: H
SCALE: 2:1		CAD FILE: DGBH62F.SLDDRW	
			SHEET 1 OF 1