

6

5

4


3

2

1

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B	ECO-14612	05/30/2025	DMAY	REVANGELISTI

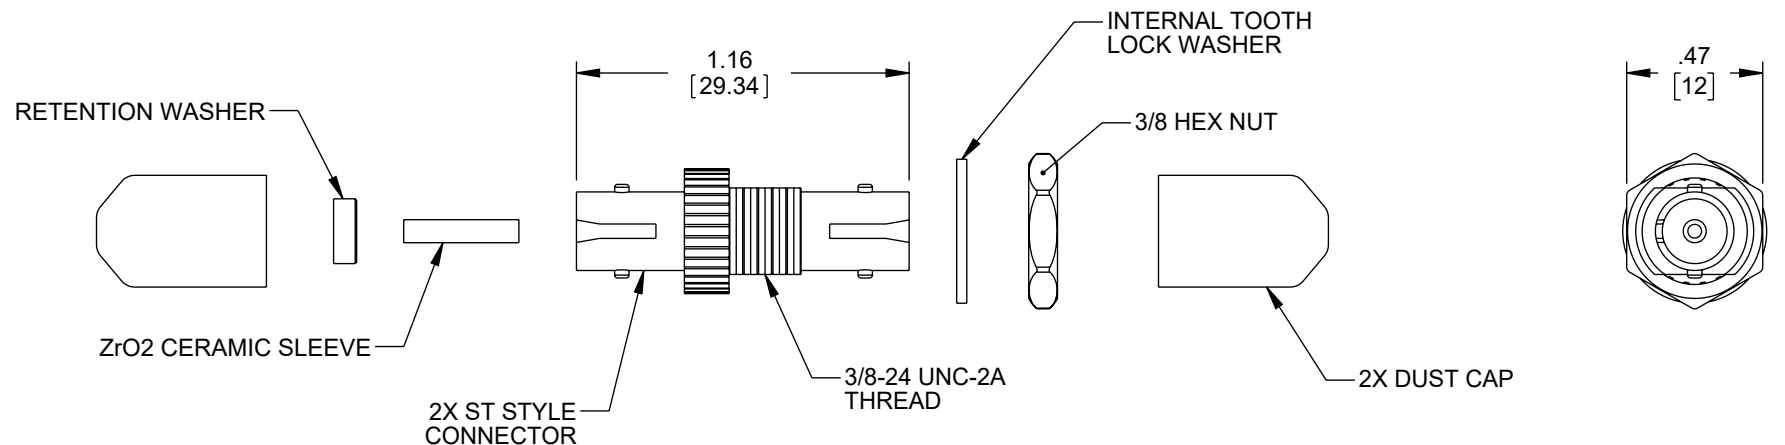


NOTES:

- MATERIALS:
BODY: ZINC ALLOY
SLEEVE: CERAMIC
LOCK WASHER: STEEL
NUT: S50C, CARBON STEEL
RETENTION WASHER: ZINC ALLOY
DUST CAP: PVC
- FINISH:
BODY: NICKEL PLATED
LOCK WASHER: NICKEL PLATED
NUT: NICKEL PLATED
RETENTION WASHER: NICKEL PLATED

- INSERTION LOSS: 0.15dB MAX
- DURABILITY: 500 MATINGS
- RETENTION FORCE: 200~600 GRAMS
- OPERATING TEMPERATURE: -40°C ~ +75°C
- MAXIMUM PANEL THICKNESS: 0.140"

- COMPONENT SHALL BE INDIVIDUALLY PACKAGED

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION).

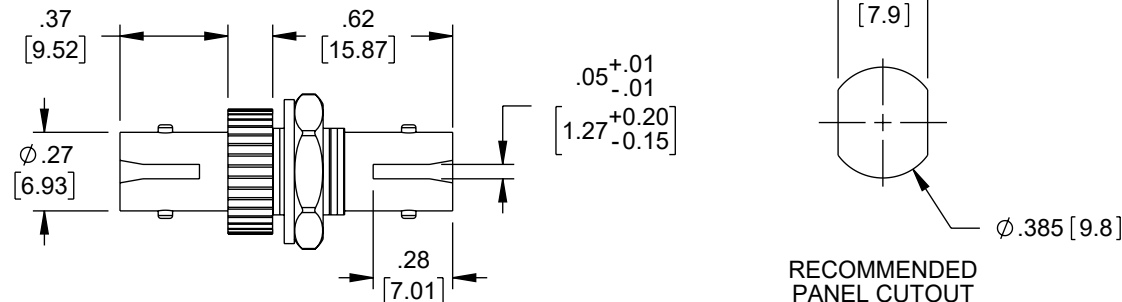

RECOMMENDED
PANEL CUTOUT

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
X = ±.2 [5] FRACTIONS
XX = ±.02 [0.5] ± 1/32
XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY

L-com
an INFINIT® brand

Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE SHEET
NONE 1 OF 1

DESCRIPTION

ADPTRST-ST SMLPX CERAMIC

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	C.MCCORMICK	FOA-001A	B

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

6

5

4

3

2

1