


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/7/17	D.FRISIELLO

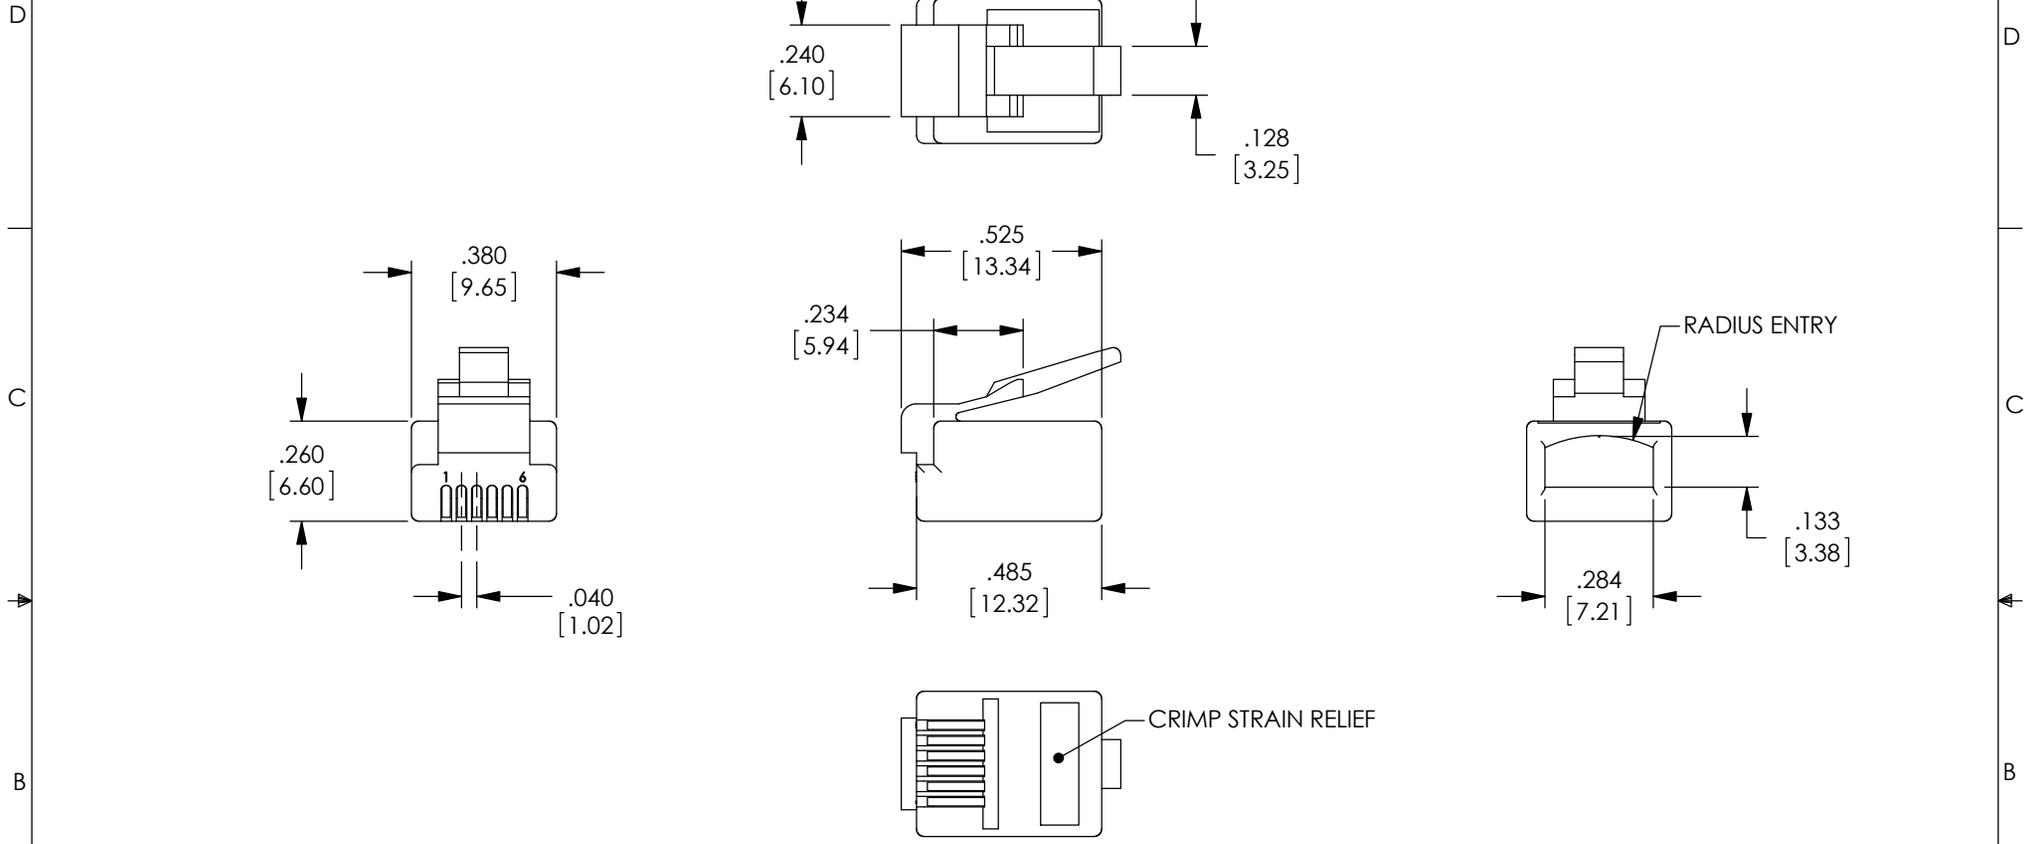

NOTES:

1. PLUG KIT CONSISTS OF: PRE-INSERTED PLUG HOUSING.
2. MATERIALS:
FRONT HOUSING PLASTIC: CLEAR POLYCARBONATE, UL 94-V0
CONTACTS: PHOSPHOR BRONZE, 50 μINCHES GOLD PLATING.
3. CONTACTS TERMINATE STRANDED OR SOLID CONDUCTORS UP TO .037" [0.94] MAX. OUTSIDE DIAMETER OF INSULATION.
4. TERMINATED PLUG HEIGHT: .237" [6.02] +/- .005 [0.13]
5. COMPONENT SHALL BE PACKAGED IN BULK OF 100 PIECES PER BAG IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

*CONTACTS SHOWN CRIMPED

REGULATORY COMPLIANCE:
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [1.27]	APPROVALS D.FRISIELLO	DATE 6/1/17			50 HIGH STREET NORTH ANDOVER, MA 01845	
	CHECKED BY M.MARTINEZ	6/7/17	CATEGORY TELECOM/MODULAR			
	APPROVED BY D.GUITADAURO	6/7/17	PRODUCT DESCRIPTION PLUG, RJ12(6X6) RND CBL			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. TSP3066R	REV. A
PROJECTION 	SCALE: NONE		CAD FILE: TSP3066R.SLDDRW		SHEET 1 OF 1	